


WIN-DECO Film

Window Decoration Film with Airfree™ Technologie

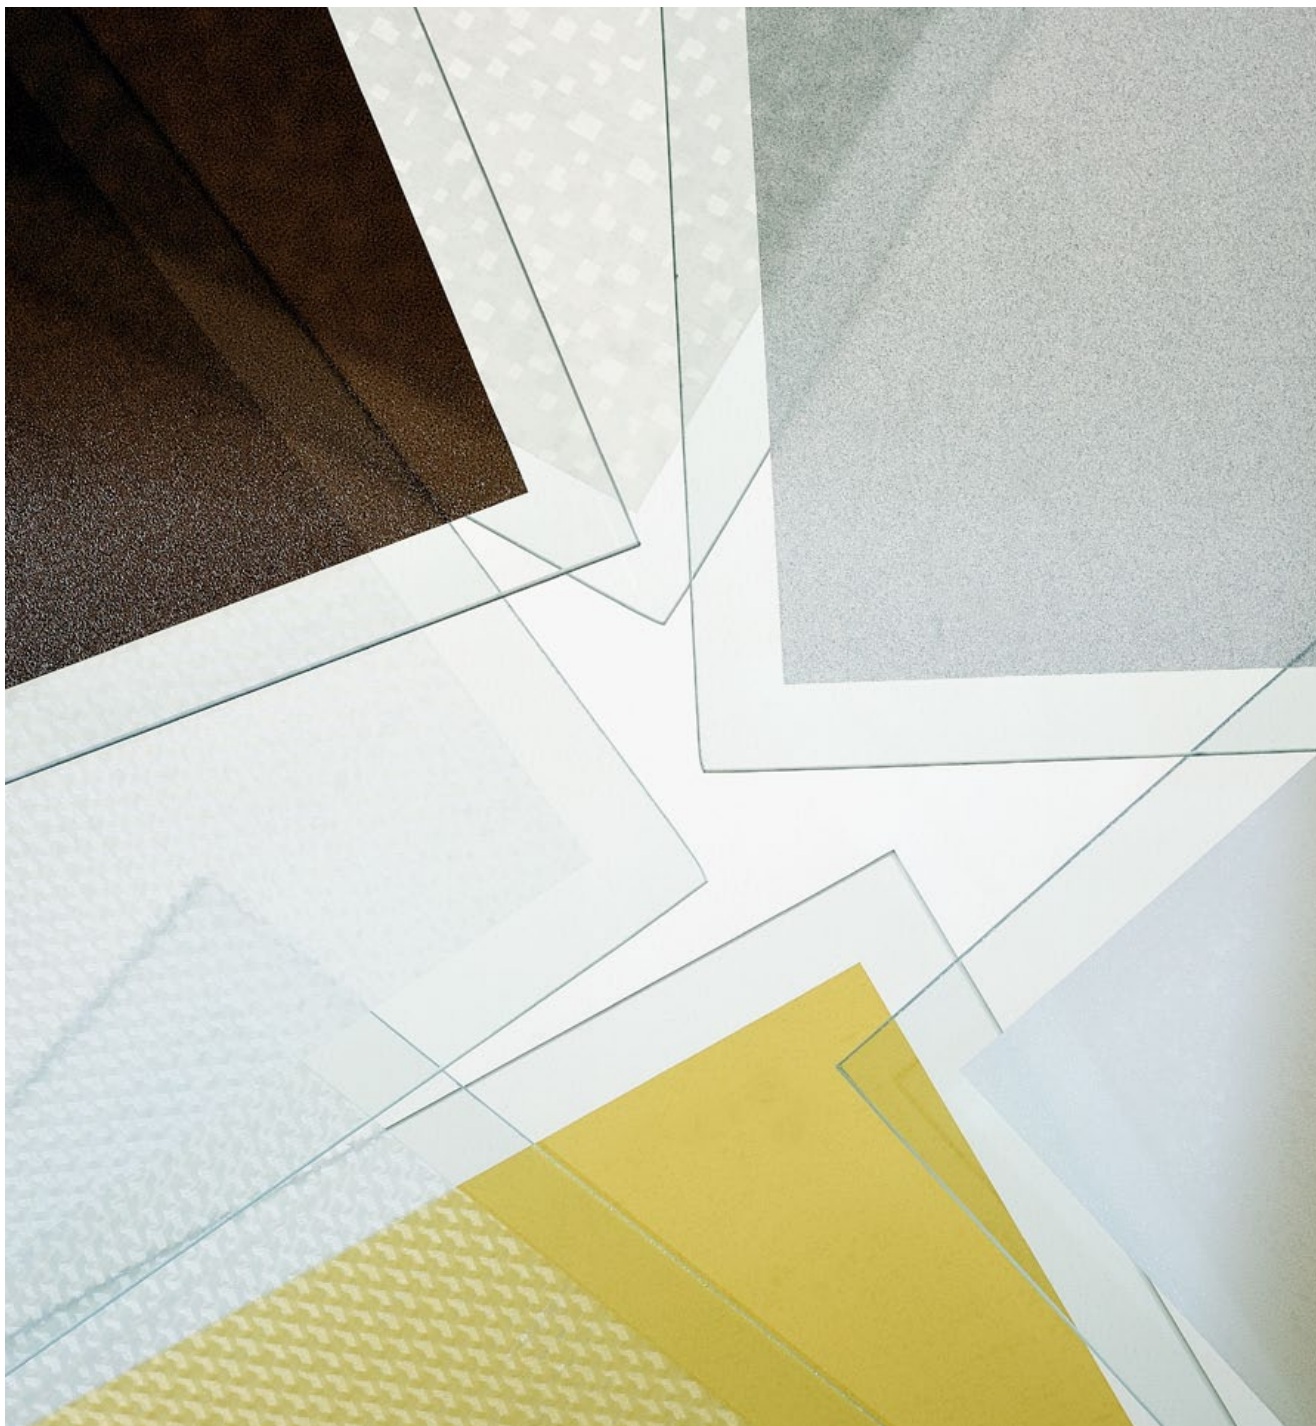

Dated: 9.2010

WIN-DECO Film

Window Decoration Film with Airfree™ Technologie

Type	LC5510/LC5511	LC5510T/LC5511T	LC5520/LC5521/ LC5522/LC5540/ LC5550	LA8082
Production	Electro cut, hand cut, kiss cut, die cut			
Application Period	Medium term applications			
Areas of Use	Application of signs and graphics for short- and midterm Applications on glass surfaces in buildings or vehicle applications. The surface of the film appears dusted or frosted. The adhesive is transparent so the color is visible from both sides.			
Colors	8			
Adhesive	Pressure sensitive, transparent, permanent, acrylic based.	Pressure sensitive, transparent, permanent, acrylic based.	Pressure sensitive, transparent, removable, acrylic based.	Pressure sensitive, transparent, permanent, acrylic based.
Application Characteristics		Airfree™ technology allows trapped air to be released during application, making it easier to remove trapped bubbles and increase overall efficiency and productivity.		
Film Coat	PVC			
Production Process	Calandered	Calandered	Calandered	Cast
Thickness	0.09 mm	0.09 mm	0.13 mm	0.05 mm
Service Temperature Range	- 45° C – + 82° C			
Application Temperature	Minimum + 10° C			
Durability	5 years	5 years	3 years	up to 5 years
Removability	Permanent	Permanent	Removable	Permanent

